

NetEnforcer™

Carrier Grade QoS/SLA Enforcement for Service Providers



wireless

DoS protection

broadband

satellite

ISPs

Web hosting

- Maximize ROI on network infrastructure
- Enforce Service Level Agreements
- Rapidly provision new subscribers
- Monitoring and IP-based accounting


Service providers have a varied subscriber base, including homes, small offices/home offices (SOHOs), branch offices and enterprise networks. Since each subscriber group has different networking needs—and not all subscribers will be online at any one instant—Internet service providers, web hosting facilities, ASPs and data centers use over-subscription to maximize return on investment (ROI). More importantly, enterprise customers are willing to pay additional fees in order to receive premium tiered services such as “Gold”, “Silver”, or “Bronze”, or classes of service that deliver the bandwidth to support specific business-critical applications such as VoIP, SAP and Citrix.



Policy-Powered Networking

Allot Communications NetEnforcer™ policy enforcement devices offer service providers a complete suite of tools for better managing over-subscription and enforcing Service Level Agreements (SLAs). The NetEnforcer lets service providers immediately identify, and then cap or limit excessive bandwidth consumers.

The NetEnforcer is an ideal platform for rapidly provisioning new subscribers, creating and enforcing multiple tiers of service, and collecting usage-based billing information for export to an external database.

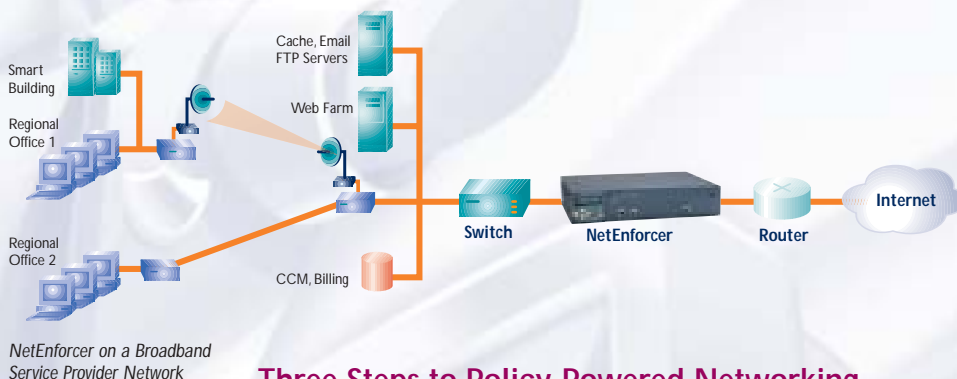

Three Steps to Policy-Powered Networking

Policy-Powered Networking lets you efficiently manage subscriber traffic accessing the service provider network. The process of implementing a Policy-Powered Networking solution on a service provider network includes three steps:

1. Provision new subscribers

Use the NetEnforcer to retrieve customer information from your Customer Care and Billing system (CCB) or text-based customer list. This automatic process retrieves the subscriber's Service Level Agreement type and defines the guaranteed minimum bandwidth as well as maximum usage limits on the NetEnforcer.

2. Enforce the rules

NetEnforcer examines subscriber usage parameters that have been defined. Upon matching a traffic session with a customer or subscriber, NetEnforcer forwards the packets according to the bandwidth parameters outlined in the SLA. Active management and enforcement of the Service Level Agreement (SLA) ensures that your customers receive exactly the bandwidth for which they are paying.

3. Verify/Bill

The NetEnforcer sends detailed traffic information to the billing/reporting systems, including addresses, applications used, service applied and traffic sent. This allows you to create advanced invoicing schemes such as usage-based billing, in which subscribers are charged based on the amount and type of network services that they actually use.

Web-accessible reports can also be made available to the customers, so they can monitor their usage and the level of service that they receive.

Features and Benefits

Carrier-Grade Design

The NetEnforcer AC-601 and AC-701 offer carrier-grade design with redundant critical components for fail-safe operation. Redundant hardware components on the AC-601 and AC-701 include dual fans and hot-swappable power supplies.

The AC-601 and AC-701 support a dual system configuration for full functional backup redundancy. A backup NetEnforcer senses a Primary failure and automatically becomes the active unit, transparently passing all traffic. All NetEnforcers also offer optional -48V DC power supplies.

Maximize ROI on Network Infrastructure

The NetEnforcer allows service providers to maximize ROI by effectively managing "bandwidth contention" and over-subscription. On many networks as little as 5% of the subscribers use up to 80% of the bandwidth. Use NetEnforcer to manage bandwidth usage and to over-subscribe your services as well as attract lucrative enterprise customers.

Increased Revenue Through SLA Enforcement


Offering Service Level Agreements (SLAs) allows you to charge a premium for your IP services. The NetEnforcer enables you to enforce SLAs by assigning fixed minimum and maximum amounts of bandwidth to your customers so that they receive exactly the bandwidth they pay for—no more and no less. No longer do they pay for 256 Kbps and receive 1 Mbps. This "extra" bandwidth can be sold to additional paying customers, increasing your bottom line.

Rapidly Provision New Subscribers

NetEnforcer enables rapid customer provisioning with its superior GUIs for policy setting and integration with CCB systems. Save time by defining each customer only once in your customer care directory, and NetEnforcer will automatically retrieve the subscriber's SLA type (such as "Gold" "Silver" and "Bronze") and apply the guaranteed minimum and maximum bandwidth limits.


Pipe Policy Hierarchy

The NetEnforcer's "Pipe" policy hierarchy was especially designed for the quality of service (QoS) needs of services providers. You can create a "Pipe" to define a customer and then define policies called "Virtual Channels" that enable QoS for their traffic.

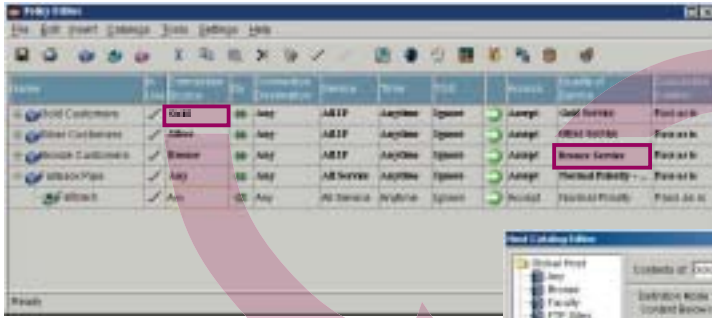

Policy Editor

The Policy Editor is used to set up QoS. Double-clicks conveniently launch editors for defining tiered services and Hosts.

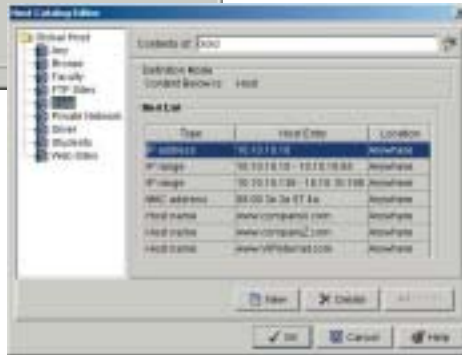

Pipes also enable you to dynamically allocate bandwidth and automatically apply the relevant QoS policies. Only after matching a session to a rule (such as a subscriber's IP address), does the NetEnforcer enable a VC. This allows you to define more VCs than are actively handled at any one time. With this feature, a NetEnforcer that supports 8,000 VCs can, for example, provide QoS for more than 20,000 subscribers.

Policy Editor

The Policy Editor is used to define Virtual Channels and Pipes that specify network actions and enable QoS. Special emphasis has been placed on ease-of-use and ergonomics to speed policy creation, enable rapid provisioning of subscribers, and ease maintenance tasks that enforce multiple tiers of service. The Policy Editor offers advanced features such as drag-and-drop creation of policies and rules, and right-clicks to launch relevant monitoring views.

Monitoring and IP-Based Accounting

The NetEnforcer Traffic Monitor presents macro and micro views of traffic and performance from a single, easy-to-read GUI, enabling you to immediately identify, and then cap or limit excessive bandwidth consumers. NetEnforcer lets you view traffic per users, sessions and applications. Special emphasis has been placed on ease-of-use and ergonomics, with such features as mouse-overs with tool tips; the ability to save frequently used monitoring views as "My Favorite"; and extensive navigational shortcuts using right mouse-clicks. Exporting the NetEnforcer Accounting data to solutions of Allot partners such as Portal, RODOPI, TeleKnowledge, Bridgewater and XACCT enables usage-based billing.

The NetHistory utility allows you to monitor and store application and resource usage data for up to six months. Through analysis of historical data, you can set more accurate traffic policies, proactively plan network capacity, and more effectively over-subscribe your services.



Customizable, Java-based Traffic Monitor

LCD/Soft Key Configuration

An LCD and set of soft keys located on the front panel of the NetEnforcer speed the initial configuration of the device. No longer do you need to use a command line interface (CLI) to set the IP address. Instructions on the LCD guide you through the process and all data is entered using the four-key keypad. The soft keys also allow you to quickly view a variety of system status messages that appear on the LCD.

Per-Flow Queuing

The NetEnforcer uses a unique approach to queuing called Per-Flow Queuing (PFQ) in which each new connection flow gets its own queue. The new queue is treated equally with other flows having the same priority policy class ("fairness").

LDAP Directory and Backend Support

The NetEnforcer interfaces to standard LDAP-based directories. This enables service providers to integrate their network policies with their customer care and billing database (CCB). This feature enables the solutions provider to assign minimum and maximum service level guarantees for each customer via the database.

End-to-End QoS Delivery

To achieve end-to-end QoS, NetEnforcer uses industry-standard Type of Service (ToS) and Differentiated Services (DiffServ) protocols. Based on its classification results, the NetEnforcer can mark the outgoing packets with DiffServ values such as "Assured" or "Best Effort" to signal the entire network (i.e., the backbone routers) of the desired QoS.

Traffic Redirection Control (Optional)

The CacheEnforcer™ lets network managers seamlessly add servers and distribute traffic according to the individual capabilities of each server. It simplifies caching administration by giving network managers a single point to manage multiple cache servers and frees additional resources for over-subscription.

The NetBalancer™ allows you to control and balance traffic to server farms. It goes beyond traditional load balancing equipment by allowing you to define single policies that control both the prioritization of applications on the network and the distribution of those applications to servers.

Product Specifications

Interface Connections

- AC-601: Two 10/100BASE-T Half/Full Duplex Autosense Ethernet Interfaces with RJ-45 connectors
- AC-701/C: Two 1000BASE-T Full Duplex Ethernet Interfaces with RJ-45 connectors
- AC-701/F: Two 1000BASE-SX Fiber Interfaces with SC-type connectors

Traffic Classification

- Per flow by IP/MAC address (with IP range/subnet option), network protocols and TCP/UDP ports (with port range option)
- Content inspection of HTTP header including: file type, URL, HTTP method and Host name
- Protocol Authentication (HTTP)
- TOS byte - DiffServ or IP Precedence bits
- IP and non-IP (IP/MAC address) type traffic
- Time of day/week/month/year

QoS Enforcement

- Hierarchy of policy rules with inbound/outbound traffic management
- Minimum/maximum bandwidth enforcement per flow/VC/Pipe
- Ten levels of priorities for VC/Pipe/connection
- Per flow guaranteed bandwidth, burst rate, CBR (for connection)
- Maximum number of connections per VC/Pipe
- Priority per connection or per VC
- Fairness between equal-level-priority traffic flows
- Admission control with accept by priority, reject, drop
- ToS byte re-mark (in-profile bytes/out-of-profile bytes/admission control)
- "Reserve-on-Demand" bandwidth for very high priority traffic

Network Security

- Access control - pass/reject/drop
- Protection from Denial of Service (DoS) attacks

Connection Control

- Connection control including cache redirection and server load balancing (optional software packages)

Configuration

- IP configuration and setup via integrated LCD and keypad
- Remote policy configuration via Web browser or Command Line Interface

QoS Policy Management

- Easy-to-manage, single-table view based on catalogs
- Dynamic expansion of VCs/Pipes to multiple hosts
- Host definition per IP, IP range, MAC address, DNS name, LDAP query, Text file
- Policy distribution from NetEnforcer to other units

Monitoring and Accounting

- **Monitoring** - Top clients, top servers, top VCs, top Pipes and protocol distribution, VC/Pipe distribution, number of connections, utilization, dropped packets, bandwidth usage with 30-second granularity and storage of historical data from the last 6 months
- **Accounting** (via Optional NetAccountant) - In-box accounting of traffic per session for all sessions; accounting using RADIUS server; powerful report generator; ODBC interface
- **SNMP** - support statistics collection per VC/Pipe using SNMP-based tools and presentation by MRTG and other graphic tools

Fail-Safe Performance

- Hardware bypass (AC-601, AC-701/F only)
- Full redundancy support (dual configuration with hot-standby and policy distribution)

Network Standards Support

- COPS, LDAP, DiffServ/TOS (RFCs 2474, 2475, 2597, 2598), IP Precedence (RFC 791), SNMP, RADIUS and ODBC

Browser Support

- MS Internet Explorer 5.01, 5.5
- Netscape Navigator 4.5, 4.6, 4.7, 6.0

Dimensions

- Standard 2U by 19-inch, rack mountable
- Height: 3.46 in. (88 mm), Width: 17.32 in. (440 mm), Depth: 14.76 in. (375 mm)

Power Requirements

- Input Voltage: 100-240V AC, 47-63Hz; -48V DC (Optional)
- Dual hot-swappable power supply

Environmental Standards Compliance & Certification

- EMC Directive 89/336/EEC, EN60950, ETS 300 019-2-2, ETS 300 019-2-3
- FCC, Part 15 Class B
- IEC-68
- UL 60950

Americas

250 Prairie Center Drive, #335
Eden Prairie, MN 55344
USA
Tel: (952) 944-3100
Fax: (952) 944-3555

Western Europe

World Trade Center
1300 Route Des Cretes
BP255
Sophia Antipolis Cedex
France 06905
Tel: 33 (0)4 92 38 80 27
Fax: 33 (0)4 92 38 80 33

Asia Pacific

9 Raffles Place
Republic Plaza #27-01
Singapore 048619
Tel: 65 832 5663
Fax: 65 832 5662

Japan

Nishi Ginza Bldg. 2F
5-5-9 Ginza Chuo-ku
Tokyo 104-0061
Tel: 81 (0)3 5537 7114
Fax: 81 (0)3 5537 5281

Eastern Europe, Africa

5 Hanagar Street
Industrial Zone
Hod Hasharon 45800
Israel
Tel: 972 (0)9 761 9200
Fax: 972 (0)9 744 3626

www.allot.com
info@allot.com

Ordering Information

* Total VCs is the maximum number of VCs when all VCs will be conditioned based on IP addresses and will reside in the Default Pipe.

Part No.	Model	Bandwidth	Pipes	Total VCs*	Connections
K106001	AC-601	100 Mbps	4096	28000	256000
K107002	AC-701/C	155 Mbps	4096	28000	256000
K107003	AC-701/F	155 Mbps	4096	28000	256000

